




## 6W Ext. Ku-Band Block Up Converter

### KEY FEATURES


- ◆ Output frequency 13.75 - 14.50 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability.
- ◆ Double- L.O. (switchable 12.80 & 13.05 GHz)
- ◆ Incomparable low power consumption (35W max)
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver.2 and 3) and optional FSK
- ◆ Auto-ranging 15-60 VDC powering option
- ◆ Digital temperature compensation
- ◆ Power and lock status LED
- ◆ Built-in redundancy option
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability reference (optional)

### ABE6KXHM / ABE6KXHMF

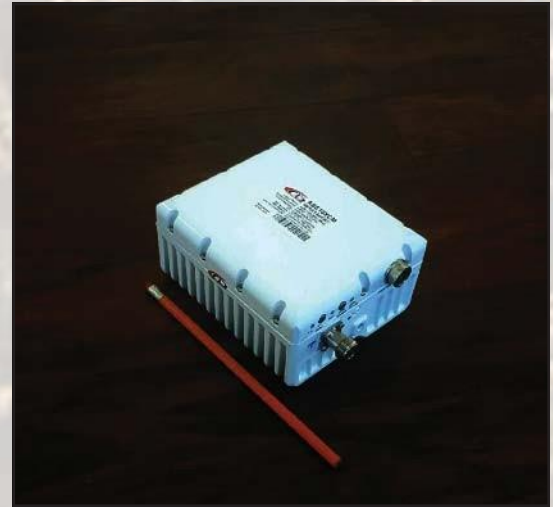

This smallest and lightest 6W L-To Ku-Band Block Up Converter is based on GaN technology. Double L.O. and field- Exchangeable connector make unit universal for any Ku-Band application. Incomparable low power consumption allows the BUC to be powered by iDirect and similar modems. Internal 10MHz reference option enables using the BUC with the modems without 10MHz reference.

### Mechanical Drawing

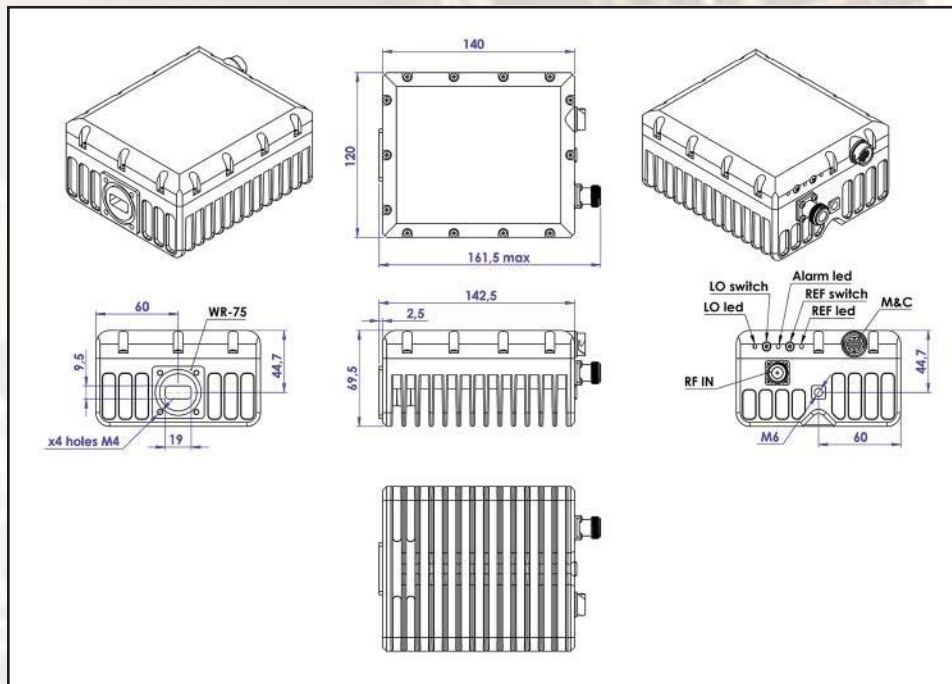



# 6W Ext. Ku-Band Block Up Converter

## TECHNICAL SPECIFICATIONS

<b>RF frequency</b>	13.75 - 14.50 GHz
<b>Dual local oscillator</b>	12.80 and 13.05 GHz
<b>IF frequency</b>	950 to 1,700 MHz
<b>Output power</b>	6W (+38 dBm min.)
<b>IF connector</b>	N-type or F-type (field-exchangeable)
<b>Power supply : auto-ranging via IF connector</b>	+15 VDC ~ +60 VDC, 35W max.
<b>Output interface</b>	WR 75 G
<b>Gain</b>	62 dB nominal
<b>IMD3 (two tones)</b>	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
<b>L.O. leakage</b>	-45 dBm max
<b>Spurious</b>	-50 dBc max
<b>Spectral regrowth</b> (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc
<b>Requirement for external reference:</b> frequency input power	<b>via IF cable</b> 10 MHz (sine-wave) -5 to +5 dBm @ input port
<b>TX Gain variation</b>	± 0.5 dB over 40 MHz
<b>TX Gain stability over temperature range</b>	± 1.8 dB over full band ± 1.5 dB typ., ± 1.8 dB max.
<b>Phase noise</b>  (Exceeds Intelsat's standard IESS308/309)	-53 dBc/Hz max. @ 10 Hz -63 dBc/Hz max. @ 100 Hz -73 dBc/Hz max. @ 1 KHz -83 dBc/Hz max. @ 10 KHz -93 dBc/Hz max @ 100 KHz -113 dBc/Hz max @ 1 MHz
<b>Noise power density</b>	<b>Transmit</b> -66 dBm/Hz (max) <b>Receive</b> -157 dBm/Hz (max)
<b>FSK</b>	Multiplexed on TX IFL, compatible with Comtech and Paradigm
<b>M&amp;C Interface</b>	RS-232, RS-485 and Ethernet (HTTP and SNMP ver.2 and 3)
<b>Noise figure</b>	15 dB max
<b>Input V.S.W.R.</b>	1.5 : 1 max
<b>Output V.S.W.R.</b>	1.5 : 1 max.
<b>Mute</b>	Shut off the HPA if L.O. unlocked
<b>Status LED</b>	<b>RED</b> <b>GREEN</b> <b>YELLOW</b> <b>YELLOW blinking</b>
<b>Summary alarm</b>	All OK All OK standard L.O. 13.05 GHz All OK extended L.O. 12.80 GHz
<b>Temperature range (ambient)</b>  operating  storage	-40 deg C to +55 deg C  -55 deg C to +85 deg C
<b>Vibration and shock</b>	Complies with MIL-STD-810E
<b>Dimensions &amp; housing</b>	140 (L) x 120 (W) x 69.5 (H) mm  5.51" (L) x 4.72" (W) x 2.78" (H)
<b>Weight</b>	1.2 kg (2.6 lbs) max

